



Schill + Seilacher

Distributed by:

CELLCHEM INTERNATIONAL LLC

6065 Roswell Road NE, #1373

Atlanta, GA 30328-4011

Phone: (770) 514-8610

Fax: (770) 514-8618

Email: drspicher@cellchem.us



Technical Data Sheet

STRUKSILON 8182

Silicone Stabiliser for Flexible PU–Slabstock Foam

Application Fields


STRUKSILON 8182 was developed as universal silicone stabiliser of high potency for the production of conventional flexible polyurethane slabstock foam, especially with low densities based on polyether polyols.

STRUKSILON 8182 is applicable in systems for nearly all known flexible PU slabstock foam applications and technologies like production of seats, chairs, mattresses etc. in the furniture and automotive industry or for all kinds of damping devices.

Chemical and Physical Properties

According to its chemical structure STRUKSILON 8182 is a polyether modified polydimethyl siloxane resistant to hydrolysis

General chemical structure:

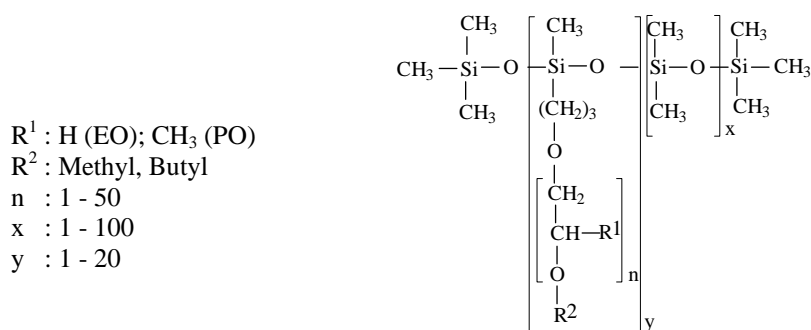

The data given are typical values which are not intended for use in preparing specifications. For test methods refer to the corresponding supplement.

Schill + Seilacher "Struktol"
 Aktiengesellschaft
 Moorfleeter Str. 28
 22113 Hamburg
 GERMANY

Phone: +49 40 73 36 2-0
 Fax: +49 40 73 36 2-194
 E-Mail: info@struktol.de

www.struktol.de



STRUKSILON 8182 is a clear, colourless to slightly yellow liquid of middle viscosity, has strong stabiliser properties and is miscible with water at room temperature.

Viscosity at 25°C	[mPas]	180 – 450
Turbidity point	[°C]	32
Density at 25°C	[kg/m ³]	app. 1020
Flash point (DIN/ISO 2562)	[°C]	> 100
Refractive index		1.443

Technical Properties

STRUKSILON 8182 is a stabiliser of high potency. It induces a balanced relation between a high quantity of open cells and good air flow as well as a uniform cell and density distribution combined with good physical and mechanical properties in produced flexible block foams.

STRUKSILON 8182 shows an excellent emulsifying efficiency and compatibility when used with polyetherpolyols.

Furthermore, STRUKSILON 8182 possesses wide processing latitude according to the used amount and different raw materials.

STRUKSILON 8182 is recommended for the production of flexible PU slabstock foams with a density range of approximately 10 – 30 kg/m³.

STRUKSILON 8182 can be used in combination with all usual co-blowing agents like methylenechloride or acetone. Application in new low pressure technologies should be recommended.

Recommended Dosage

Usually, STRUKSILON 8182 is applied in quantities of 0.7 to 3.0 php (parts on 100 parts polyol). We recommend to adjust the optimum dosage to the corresponding formula, type and amount of activators, catalysts, blowing agents and the activity of raw materials.

However, a concentration of 5.0 php should not be exceeded.

The data given are typical values which are not intended for use in preparing specifications. For test methods refer to the corresponding supplement.

Product Safety and Handling

STRUKSILON 8182 is not a hazardous material for the purposes of hazardous materials regulations. STRUKSILON 8182 does not contain aminic components.

Further information regarding safety, toxicology, special properties of the product, transport and storage are given in the safety data sheet.

Packaging, Storage and Transport

Storage stability 12 months in closed original containers if transported and stored at a temperature between 1 and 30°C.

Packaging 200 kg drums
1000 kg containers (IBC)

The suggestions for application and usage of our products as well as possible proposed formulations are meant to advise only to the best of our knowledge. This information is without obligation and does not release customers from their own testings to ensure suitability for intended processes and use. Liability is only accepted in case of intention or gross negligence. Liability for any defects caused by minor negligence are not accepted. Each producer is responsible and liable to observe legislation and patent rights of third parties.

This new leaflet replaces all previously printed documentation.

Alterations reserved. 11/2005

Schill + Seilacher "Struktol" Aktiengesellschaft Moorfleeter Straße 28 22113 Hamburg Germany
Phone: +49 40 73362-0 Fax: +49 40 73362-194 E-Mail: info@struktol.de